





The Juniper Networks Secure Services Gateway 500 (SSG 500) Series consists of purpose-built security appliances that deliver the perfect blend of performance, security, routing and LAN/WAN connectivity for large, regional branch offices and medium-sized, standalone businesses.

Traffic flowing in and out of the regional office or business is protected from worms, spyware, Trojans and malware by a complete set of Unified Threat Management (UTM) security features including stateful firewall, IPSec VPN, IPS, antivirus (includes anti-spyware, anti-adware, anti-phishing), anti-spam and Web filtering. The SSG 500 Series comprises the SSG 550/SSG 550M and the SSG 520/SSG 520M.

The SSG 550 deployed at a branch office for secure Internet connectivity and site-to-site VPN to corporate headquarters. Internal branch office resources are protected with unique security policies applied to each Security Zone.

Juniper Networks SSG 500 Series

Portfolio Description


The SSG 500 Series consists of high-performance security platforms for regional branch office and medium-sized, standalone businesses that want to stop internal and external attacks, prevent unauthorized access and achieve regulatory compliance. The SSG 550/SSG 550M provides 1 + Gbps of stateful firewall performance and 500 Mbps of IPSec VPN performance, while the SSG 520/SSG 520M provides 650 Mbps of stateful firewall performance and 300 Mbps of IPSec VPN performance.

Security: Protection against worms, viruses, Trojans, spam and emerging malware is delivered by proven Unified Threat Management (UTM) security features that are backed by best-in-class partners. To address internal security requirements and facilitate regulatory compliance, the SSG 500 Series supports an advanced set of network protection features such as Security Zones, virtual routers and VLANs that allow administrators to divide the network into distinct, secure domains, each with their own unique security policy. Policies protecting each Security Zone can include access control rules and inspection by any of the supported UTM security features.

Connectivity and Routing: The SSG 500 Series provides four onboard 10/100/1000 interfaces complemented by six I/O expansion slots that can house a mix of LAN or WAN interfaces, making the SSG 500 Series an extremely flexible platform. The broad array of I/O options coupled with WAN protocol and encapsulation support makes SSG 500 Series platforms easily deployable as traditional branch office routers or as consolidated security and routing devices to reduce CAPEX and OPEX.

Access Control Enforcement: The SSG 500 Series platforms can act as enforcement points in a Juniper Networks unified access control deployment with the simple addition of the Infranet Controller. The Infranet Controller functions as a central policy management engine by interacting with the SSG 500 Series to augment or replace the firewall-based access control with a solution that grants/denies access based on more granular criteria, including endpoint state and user identity in order to accommodate the dramatic shifts in attack landscape and user characteristics.

World-Class Support: From simple lab testing to major network implementations, Juniper Networks Professional Services will collaborate with your team to identify goals, define the deployment process, create or validate the network design and manage the deployment to its successful conclusion.

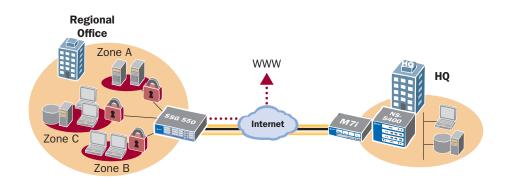

Features and Benefits

Feature	Feature Description	Benefit
High performance	Purpose-built platform is assembled from custom-built hardware, powerful processing and a security-specific operating system.	Delivers performance headroom required to protect against internal and external attacks now and into the future.
Best-in-class UTM security features	UTM security features (antivirus, anti-spam, Web filtering, IPS) stop all manner of viruses and malware before they damage the network.	Ensures that the network is protected against all manner of attacks.
Integrated antivirus	Annually licensed antivirus engine, provided by Juniper, is based on Kaspersky Lab engine.	Stops viruses, spyware, adware and other malware.
Integrated anti-spam	Annually licensed anti-spam offering, provided by Juniper, is based on Symantec technology.	Blocks unwanted email from known spammers and phishers.
Integrated Web filtering	Annually licensed Web filtering solution, provided by Juniper, is based on SurfControl's technology.	Controls/blocks access to malicious Web sites.
Integrated Intrusion Prevention System (IPS) (Deep Inspection)	Annually licensed IPS engine is available with Juniper Networks Deep Inspection Firewall Signature Packs.	Prevents application-level attacks from flooding the network.
Fixed Interfaces	Four fixed 10/100/1000 interfaces, two USB ports, one Console port and one Auxiliary port are standard on all SSG 500 series models.	Provides high-speed LAN connectivity, future connectivity and flexible management.
Network segmentation	Bridge groups, security zones, virtual LANs and virtual routers allow administrators to deploy security policies to isolate guests, wireless networks and regional servers or databases.*	Powerful capabilities facilitate deploying security for various internal, external and DMZ sub-groups on the network, to prevent unauthorized access.
Interface modularity	Six interface expansion slots support optional T1, E1, Serial, ADSL/ADSL2/ADSL2+, G.SHDSL, DS3, E3, 10/100/1000, 10/100 and SFP connectivity.	Delivers combination of LAN and WAN connectivity on top of unmatched security to reduce costs and extend investment protection.
Robust routing engine	Proven routing engine supports OSPF, BGP and RIP v1/2 along with Frame Relay, Multilink Frame Relay, PPP, Multilink PPP and HDLC.	Enables the deployment of consolidated security and routing device, thereby lowering operational and capital expenditures.
Juniper Networks unified access control enforcement point	Interacts with the centralized policy management engine (Infranet Controller) to enforce session-specific access control policies using criteria such as user identity, device security state and network location.	Improves security posture in a cost-effective manner by leveraging existing customer network infrastructure components and best-in-class technology.
Management flexibility	Use any one of three mechanisms, CLI, WebUI or Juniper Networks Network and Security Manager (NSM), to securely deploy, monitor and manage security policies.	Enables management access from any location, eliminating on-site visits thereby improving response time and reducing operational costs.
Auto-Connect VPN	Automatically sets up and takes down VPN tunnels between spoke sites in a hub-and-spoke topology.	Provides a scalable VPN solution for mesh architectures with support for latency-sensitive applications such as VoIP and video conferencing.
World-class professional services	From simple lab testing to major network implementations, Juniper Networks Professional Services will collaborate with your team to identify goals, define the deployment process, create or validate the network design and manage the deployment.	Transforms the network infrastructure to ensure that it is secure, flexible, scalable and reliable.

Product Options

Option	Option Description	Applicable Products
Single or redundant AC or DC power supplies	All SSG 500 series models are available with either AC or DC power supplies. The SSG 520 and SSG 520M offer a single power supply. The SSG 550 and SSG 550M are available with optional redundant power supplies.	SSG 550/SSG 550M SSG 520/SSG 520M
Network Equipment Building Systems (NEBS) compliance	NEBS-compliant versions of the SSG 520M and the SSG 550M are available.	SSG 550M SSG 520M
DRAM	All SSG 500 series models are available with 1 GB of DRAM. The SSG 520 and SSG 550 are also available in 512 MB-DRAM versions.	SSG 550/SSG 550M SSG 520/SSG 520M
Unified Threat Management/Content Security (high memory option required)	The Juniper SSG 500 series can be configured with any combination of the following best-in-class UTM and content security functionality: antivirus (includes antispyware, anti-phishing), IPS (Deep Inspection), Web filtering and/or anti-spam.	SSG 550 high-memory model only /SSG 550M SSG 520 high-memory model only /SSG 520M
I/O options	Six interface expansion slots support optional T1, E1, Serial, DS3, 10/100/1000, 10/100 and SFP connectivity.	SSG 550/SSG 550M SSG 520/SSG 520M

^{*}Bridge groups supported only on uPIMs in ScreenOS 6.0 and greater releases

Specifications

	Juniper Networks SSG 520/SSG 520M	Juniper Networks SSG 550/SSG 550M
Maximum Performance and Capacity ⁽¹⁾		
ScreenOS version tested	ScreenOS 6.1	ScreenOS 6.1
Firewall performance (Large packets)	650+ Mbps	1+ Gbps
Firewall performance (IMIX)(2)	600 Mbps	1 Gbps
Firewall Packets Per Second (64 byte)	300,000 PPS	600,000 PPS
AES256+SHA-1 VPN performance	300 Mbps	500 Mbps
3DES+SHA-1 VPN performance	300 Mbps	500 Mbps
Maximum concurrent sessions	128,000	256,000
New sessions/second	10,000	15,000
Maximum security policies	4,000	4,000
Maximum users supported	Unrestricted	Unrestricted
Convertible to JUNOS 8.0 or higher	SSG 520M Only	SSG 550M Only
Network Connectivity		
Fixed I/O	4×10/100/1000	4x10/100/1000
Physical Interface Module (PIM) Slots	6 (2 ePIM/uPIM/PIM + 4 uPIM/PIM)	6 (4 ePIM/uPIM/PIM + 2 uPIM/PIM)
WAN interface options (PIMS)	Serial, T1, E1, DS3, E3, ADSL/ADSL2/ADSL2+, G.SHDSL	Serial, T1, E1, DS3, E3, ADSL/ADSL2/ADSL2+, G.SHDSL
LAN interface options (ePIMS and uPIMS)	10/100, 10/100/1000, and SFP	10/100, 10/100/1000, and SFP
Firewall	4 4 4	4
Network attack detection	Yes	Yes
DoS and DDoS protection	Yes	Yes
TCP reassembly for fragmented packet protection	Yes	Yes
Brute force attack mitigation	Yes	Yes
SYN cookie protection	Yes	Yes
Zone-based IP spoofing	Yes	Yes
Malformed packet protection	Yes	Yes
Unified Threat Management (3)		•
	Yes	Yes
IPS (Deep Inspection firewall)	Yes	Yes
Protocol anomaly detection Stateful protocol signatures	Yes	Yes
IPS/DI attack pattern obfuscation	Yes	Yes
Antivirus	Yes	Yes
Signature database	200,000+	200,000+
Protocols scanned	POP3, HTTP, SMTP, IMAP, FTP, IM	POP3, HTTP, SMTP, IMAP, FTP, IM
Anti-spyware	Yes	Yes
Anti-adware	Yes	Yes
Anti-keylogger	Yes	Yes
Instant message AV	Yes	Yes
Anti-spam	Yes	Yes
Integrated URL filtering	Yes	Yes
External URL filtering ⁽⁴⁾	Yes	Yes
Voice over IP (VoIP) Security	.00	100
H.323 ALG	Yes	Yes
SIP ALG	Yes	Yes
MGCP ALG	Yes	Yes
SCCP ALG	res Yes	Yes
NAT for VoIP protocols	Yes	Yes

	Juniper Networks SSG 520/SSG 520M	Juniper Networks SSG 550/SSG 550M
PSec VPN		
Concurrent VPN tunnels	500	1,000
Tunnel interfaces	100	300
DES (56-bit), 3DES (168-bit) and AES (256-bit)	Yes	Yes
MD-5 and SHA-1 authentication	Yes	Yes
Manual key, IKE, IKEv2 with EAP, PKI (X.509)	Yes	Yes
Perfect forward secrecy (DH Groups)	1,2,5	1,2,5
Prevent replay attack	Yes	Yes
Remote access VPN	Yes	Yes
L2TP within IPSec	Yes	
IPSec NAT traversal	Yes	Yes
Auto-Connect VPN	Yes	Yes Yes
Redundant VPN gateways	Yes	Yes
ser Authentication and Access Control		
Built-in (internal) database - user limit	500	1,500
Third-party user authentication	RADIUS, RSA SecureID, LDAP	RADIUS, RSA SecureID, LDAP
RADIUS Accounting	Yes – start/stop	Yes – start/stop
XAUTH VPN authentication	Yes	Yes
Web-based authentication	Yes	Yes
802.1X authentication	Yes	Yes
Unified access control enforcement point	Yes	Yes
KI Support		
PKI Certificate requests (PKCS 7 and PKCS 10)	Yes	Yes
Automated certificate enrollment (SCEP)	Yes	Yes
Online Certificate Status Protocol (OCSP) Certificate Authorities supported	Yes VeriSign, Entrust, Microsoft, RSA Keon, iPlanet (Netscape)	Yes VeriSign, Entrust, Microsoft, RSA Keon, iPlanet (Netso
Self-signed certificates	Baltimore, DoD PKI Yes	Baltimore, DoD PKI Yes
/irtualization		
Maximum number of security zones	60	60
Maximum number of virtual routers	5	8
Bridge groups*	Yes	Yes
Maximum number of VLANs	125	150
Routing	120	100
	10	15
BGP instances	10	15
BGP peers	64	128
BGP routes	250,000	250,000
OSPF instances	3	8
OSPF routes	250,000	250,000
RIP v1/v2 instances	128	256
RIP v2 routes	250,000	250,000
Static routes	250,000	250,000
Source-based routing	Yes	Yes
Policy-based routing	Yes	Yes
ECMP	Yes	Yes
Multicast	Yes	Yes
	Yes	Yes
Reverse Path Forwarding (RPF)		Voo
Reverse Path Forwarding (RPF) IGMP (v1, v2)	Yes	Yes
<u> </u>	Yes Yes	Yes
IGMP (v1, v2)		
IGMP (v1, v2) IGMP Proxy	Yes	Yes

^{*}Bridge groups supported only on uPIMs in ScreenOS 6.0 and greater releases

	Juniper Networks SSG 520/SSG 520M	Juniper Networks SSG 550/SSG 550M
Encapsulations	, , , , , , , , , , , , , , , , , , , ,	,
PPP	Yes	Yes
MLPPP	Yes	Yes
MLPP max physical interfaces	8	8
Frame Relay	Yes	Yes
MLFR (FRF .15, FRF .16)	Yes	Yes
MLFR max physical interfaces	12	12
HDLC	Yes	Yes
IPv6		
Dual stack IPv4/IPv6 firewall and VPN	Yes	Yes
IPv4 to/from IPv6 translations and encapsulations	Yes	Yes
Syn-Cookie and Syn-Proxy DoS Attack Detection	Yes	Yes
SIP, RTSP, Sun-RPC, and MS-RPC ALG's	Yes	Yes
RIPng	Yes	Yes
Mode of Operation		
Layer 2 (transparent) mode ⁽⁵⁾	Yes	Yes
Layer 3 (route and/or NAT) mode Address Translation	Yes	Yes
Network Address Translation (NAT)	Yes	Yes
Port Address Translation (PAT)	Yes	Yes
Policy-based NAT/PAT	Yes	Yes
Mapped IP	1,500	6,000
Virtual IP	16 Voc	32 Voc
MIP/VIP Grouping	Yes	Yes
P Address Assignment		
Static	Yes	Yes
DHCP, PPPoE client	Yes	Yes
Internal DHCP server	Yes	Yes
DHCP relay	Yes	Yes
Traffic Management Quality of Service (QoS)		
Guaranteed bandwidth	Yes - per policy	Yes - per policy
Maximum bandwidth	Yes - per policy	Yes - per policy
Ingress traffic policing	Yes	Yes
Priority-bandwidth utilization	Yes	Yes
DiffServ marking	Yes - per policy	Yes - per policy
ligh Availability (HA)		
Active/Active - L3 mode	Yes	Yes
Active/Passive - Transparent & L3 mode	Yes	Yes
Configuration synchronization	Yes	Yes
VRRP	Yes	Yes
Session synchronization for firewall and VPN	Yes	Yes
Session failover for routing change	Yes	Yes
Device failure detection	Yes	Yes
Link failure detection	Yes	Yes
Authentication for new HA members	Yes	Yes
Encryption of HA traffic	Yes	Yes
System Management		
WebUI (HTTP and HTTPS)	Yes	Yes
Command line interface (console)	Yes	Yes
Command line interface (telnet)	Yes	Yes
Command line interface (SSH)	Yes v1.5 and v2.0 compatible	Yes v1.5 and v2.0 compatible
Network and Security Manager (NSM)	Yes	Yes
All management via VPN tunnel on any interface	Yes	Yes
Rapid deployment	No	No

Juniper Networks SSG 550/SSG 550M
20
RADIUS, RSA SecureID, LDAP
6
Yes
TFTP, WebUI, NSM, SCP, USB
Yes
Yes - up to 4 servers
Yes
USB 1.1
Yes
Yes
Yes
17.5 x 3.5 x 21.5 in (44.5 x 8.9 x 54.6 cm)
25.0 lb (no interface modules + one power suppl 11.34 kg
Yes, 2RU
100 to 240 VAC, 420 watts
-48 to -60 VDC, 420 watts
Yes
1,145 BTU/Hour (W)
UL, CUL, CSA, CB
FCC class A, CE class A, C-Tick, VCCI class B
Level 3
12 years
Yes (SSG 550M)
Yes (SSG 550M)
Yes
32° to 122° F (0° to 50° C)
-4° to 158° F
(-20° to 70° C) 10% to 90% noncondensing
S

- (1) Performance, capacity and features listed are based upon systems running ScreenOS 6.1 and are the measured maximums under ideal testing conditions unless otherwise noted. Actual results may vary based on ScreenOS release and by deployment. For a complete list of supported ScreenOS versions for SSG platforms, please visit the Juniper Customer Support Center (http://www.juniper.net/customers/
- based on ScreenOS release and by deployment. For a complete list of supported ScreenOS versions for SSG platforms, please visit the Juniper Customer Support Center (http://www.juniper.net/customers/support/) and click on ScreenOS Software Downloads.

 (2) IMIX stands for Internet mix and is more demanding than a single packet size as it represents a traffic mix that is more typical of a customer's network. The IMIX traffic used is made up of 58.33% 64 byte packets + 35.35% 570 byte packets + 8.35% 1518 byte packets of UDP traffic.

 (3) UTM Security features (IPS/Deep Inspection, antivirus, anti-spam and Web filtering) are delivered by annual subscriptions purchased separately from Juniper Networks. Annual subscriptions provide signature updates and associated support. The high memory option is required for UTM security features.

 (4) Redirect Web filtering sends traffic from the firewall to a secondary server. The redirect feature is free. However, it does require the purchase of a separate Web filtering license from either Websense or SurfCortrol
- SurfControl.
- (5) NAT, PAT, policy-based NAT, virtual IP, mapped IP, virtual systems, virtual routers, VLANs, OSPF, BGP, RIPv2, Active/Active HA and IP address assignment are not available in Layer 2 transparent mode.

IPS (Deep Inspection firewall) Signature Packs

Signature Packs provide the ability to tailor the attack protection to the specific deployment and/or attack type. The following Signature Packs are available for the SSG 500 Series:

Signature Pack	Target Deployment	Defense Type	Type of Attack Object
Base	Branch offices, small/medium businesses	Client/server and worm protection	Range of signatures and protocol anomalies
Client	Remote/branch offices	Perimeter defense, compliance for hosts (desktops, and so on)	Attacks in the server-to-client direction
Server	Small/medium businesses	Perimeter defense, compliance for server infrastructure	Attacks in the client-to-server direction
Worm Mitigation	Remote/branch offices of large enterprises	Most comprehensive defense against worm attacks	Worms, trojans, backdoor attacks

Performance-Enabling Services and Support

Juniper Networks is the leader in performance-enabling services and support, which are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to bring revenue-generating capabilities online faster so you can realize bigger productivity gains, faster rollouts of new business models and ventures, and greater market reach, while generating higher levels of customer satisfaction. At the same time, Juniper Networks ensures operational excellence by optimizing your network to maintain required levels of performance, reliability, and availability. For more details, please visit www.juniper.net/products_and_services.

Ordering Information

SSG 550M	Part Number
SSG 550M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply	SSG-550M-SH
SSG 550M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply,	
NEBS Compliant	SSG-550M-SH-N
SSG 550M with 1 GB Memory, 0 PIM Cards, 1 DC Power Supply, NEBS Compliant	SSG-550M-SH-DC-N
SSG 550M System, 1GB DRAM, 1 AC Power Supply - NEBS and TAA Compliant	SSG-550M-SH-N-TAA
SSG 550M System, 1GB DRAM, 1 DC Power Supply - NEBS and TAA Compliant	SSG-550M-SH-DC-N-TAA
SSG 550	Part Number
SSG 550 with 512 MB Memory, 0 PIM Cards, 1 AC Power Supply	SSG-550B-001
SSG 550 with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply	SSG-550-001
SSG 550 with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply,	
NEBS Compliant	SSG-550-001-NEBS
SSG 550 with 1 GB Memory, 0 PIM Cards, 1 DC Power Supply	SSG-550-001-DC
SSG 550 with 1 GB Memory, 0 PIM Cards, 1 DC Power Supply SSG 520M	SSG-550-001-DC Part Number
SSG 520M	Part Number
SSG 520M SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply,	Part Number SSG-520M-SH
SSG 520M SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply, NEBS Compliant SSG 520M System, 1GB DRAM, 1 AC Power Supply –	Part Number SSG-520M-SH SSG-520M-SH-N
SSG 520M SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply, NEBS Compliant SSG 520M System, 1GB DRAM, 1 AC Power Supply – NEBS and TAA Compliant SSG 520M System, 1GB DRAM, 1 DC Power Supply –	Part Number SSG-520M-SH SSG-520M-SH-N SSG-520M-SH-N-TAA
SSG 520M SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply, NEBS Compliant SSG 520M System, 1GB DRAM, 1 AC Power Supply – NEBS and TAA Compliant SSG 520M System, 1GB DRAM, 1 DC Power Supply – NEBS and TAA Compliant SSG 520M System, 1GB DRAM, 1 DC Power Supply – NEBS and TAA Compliant SSG 520M with 1 GB Memory, 0 PIM Cards, 1 DC Power Supply,	Part Number SSG-520M-SH SSG-520M-SH-N SSG-520M-SH-N-TAA SSG-520M-SH-DC-N-TAA
SSG 520M SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply, NEBS Compliant SSG 520M System, 1GB DRAM, 1 AC Power Supply – NEBS and TAA Compliant SSG 520M System, 1GB DRAM, 1 DC Power Supply – NEBS and TAA Compliant SSG 520M with 1 GB Memory, 0 PIM Cards, 1 DC Power Supply, NEBS Compliant	Part Number SSG-520M-SH SSG-520M-SH-N SSG-520M-SH-N-TAA SSG-520M-SH-DC-N-TAA SSG-520M-SH-DC-N
SSG 520M SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply SSG 520M with 1 GB Memory, 0 PIM Cards, 1 AC Power Supply, NEBS Compliant SSG 520M System, 1GB DRAM, 1 AC Power Supply – NEBS and TAA Compliant SSG 520M System, 1GB DRAM, 1 DC Power Supply – NEBS and TAA Compliant SSG 520M with 1 GB Memory, 0 PIM Cards, 1 DC Power Supply, NEBS Compliant SSG 520	Part Number SSG-520M-SH SSG-520M-SH-N SSG-520M-SH-N-TAA SSG-520M-SH-DC-N-TAA SSG-520M-SH-DC-N Part Number

SSG 500 Series I/O Options	Part Number
1 Port Gigabit Ethernet 10/100/1000 Copper Enhanced PIM ¹	JXE-1GE-TX-S
1 Port Fiber Gigabit Ethernet Enhanced PIM (SFP sold separately) ¹	JXE-1GE-SFP-S
4 Port Fast Ethernet Enhanced PIM ¹	JXE-4FE-TX-S
1 Port SFP 100 Mbps or Gigabit Ethernet Universal PIM (SFP sold separate	ely) JXU-1SFP-S
Small Form Factor Pluggable 1000Base-LX Gigabit Ethernet Optical Transceiver Module	JX-SFP-1GE-LX
Small Form Factor Pluggable 1000Base-SX Gigabit Ethernet Optical Transceiver Module	JX-SFP-1GE-SX
2 Port T1 PIM with integrated CSU/DSU	JX-2T1-RJ48-S
2 Port E1 PIM with integrated CSU/DSU	JX-2E1-RJ48-S
2 Port Serial PIM	JX-2Serial-S
1 Port ADSL 2/2+ Annex A PIM	JX-1ADSL-A-S
1 Port ADSL 2/2+ Annex B PIM	JX-1ADSL-B-S
1 Port G.SHDSL PIM	JX-2SHDSL-S
1 Port DS3 PIM	JX-1DS3-S
1 Port E3 PIM	JX-1E3-S
6 Port SFP Gigabit Ethernet Universal PIM ²	JXU-6GE-SFP-S
8 Port Gigabit Ethernet 10/100/1000 Copper Universal PIM ²	JXU-8GE-TX-S
16 Port Gigabit Ethernet 10/100/1000 Copper Universal PIM ²	JXU-16GE-TX-S
Unified Threat Management/Content Security	
(High Memory Option Required)	Part Number
Antivirus (includes anti-spyware, anti-phishing)	NS-K-AVS-SSG550
, , , , , ,	NS-K-AVS-SSG520
IPS (Deep Inspection)	NS-DI-SSG550 NS-DI-SSG520
Web filtering	NS-WF-SSG550 NS-WF-SSG520
Anti-spam	NS-SPAM-SSG550 NS-SPAM-SSG520
, , ,	NS-RBO-CS-SSG550 NS-RBO-CS-SSG520
, , , , ,	NS-SMB-CS-SSG550 NS-SMB-CS-SSG520



Ordering Information (cont'd)

SSG 500 Series Memory Upgrades, Spares

and Communications Cables	Part Number
Spare Power Supply for SSG 550, AC Power	SSG-PS-AC
Spare Power Supply for SSG 550, DC Power	SSG-PS-DC
Power cable, Australia	CBL-JX-PWR-AU
Power cable, China	CBL-JX-PWR-CH
Power cable, Europe	CBL-JX-PWR-EU
Power cable, Italy	CBL-JX-PWR-IT
Power cable, Japan	CBL-JX-PWR-JP
Power cable, UK	CBL-JX-PWR-UK
Power cable, USA	CBL-JX-PWR-US
1 Gigabyte Memory Upgrade for the SSG 500 series	SSG-500-MEM-1GB
Replacement air filter for SSG 550 Series	SSG-500-FLTR
EIA530 cable (DCE)	JX-CBL-EIA530-DCE
EIA530 cable (DTE)	JX-CBL-EIA530-DTE
RS232 cable (DCE)	JX-CBL-RS232-DCE
RS232 cable (DTE)	JX-CBL-RS232-DTE
RS449 cable (DCE)	JX-CBL-RS449-DCE
RS449 cable (DTE)	JX-CBL-RS449-DTE
V.35 cable (DCE)	JX-CBL-V35-DCE
V.35 cable (DTE)	JX-CBL-V35-DTE
X.21 cable (DCE)	JX-CBL-X21-DCE
X.21 cable (DTE)	JX-CBL-X21-DT
Blank I/O plate	JX-Blank-FP-S

¹ Enhanced Pluggable Interface Modules (Enhanced PIMs) are used in ePIM slots only (SSG 520 / SSG 520M / SSG 550M / J4350 / J6350 only)

² Universal Pluggable Interface Modules (Universal PIMs) are used in either ePIM slots or regular PIM

About Juniper Networks

Juniper Networks, Inc. is the leader in high-performance networking. Juniper offers a high-performance network infrastructure that creates a responsive and trusted environment for accelerating the deployment of services and applications over a single network. This fuels high-performance businesses. Additional information can be found at www.juniper.net.



CORPORATE AND SALES HEADQUARTERS Juniper Networks, Inc. 1194 North Mathilda Avenue Sunnyvale, CA 94089 USA Phone: 888.JUNIPER (888.586.4737) or 408.745.2000 Fax: 408.745.2100 www.juniper.net

APAC HEADQUARTERS
Juniper Networks (Hong Kong)
26/F, Cityplaza One
1111 King's Road
Taikoo Shing, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

EMEA HEADQUARTERS Juniper Networks Ireland Airside Business Park Swords, County Dublin, Ireland Phone: 35.31.8903.600 Fax: 35.31.8903.601

Copyright 2008 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, JUNOS, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. JUNOSe is a trademark of Juniper Networks, Inc. All other trademarks, service marks, registered trademarks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice. 100143-009 Aug 2008

To purchase Juniper Networks solutions, please contact your Juniper Networks sales representative at 1-866-298-6428 or authorized reseller.

²Universal Pluggable Interface Modules (Universal PIMs) are used in either ePIM slots or regular PIM slots on the SSG and J-series platforms and are only supported in ScreenOS 6.0 or greater releases